



Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C/C1	B	A							
BL00430083002B0N0000	430	830	65-70	50/400	50-55	400	0,47	6,3	2,8	277	249	146	-
BL00430103002B0N0000	430	1030	65-70	50/400	50-55	400	0,57	7,5	3,4	336	303	177	-
BL00430123002B0N0000	430	1230	65-70	50/400	50-55	400	0,67	8,7	3,9	395	356	208	300
BL00430153002B0N0000	430	1530	65-70	50/400	50-55	400	0,82	10,6	4,7	484	436	255	300
BL00530083002B0N0000	530	830	65-70	50/500	50-55	500	0,55	7,2	3,2	325	293	171	-
BL00530103002B0N0000	530	1030	65-70	50/500	50-55	500	0,66	8,6	3,7	389	350	205	300
BL00530123002B0N0000	530	1230	65-70	50/500	50-55	500	0,78	10	4,3	461	415	243	300
BL00530153002B0N0000	530	1530	65-70	50/500	50-55	500	0,95	12,1	5,2	561	505	295	300
BL00630083002B0N0000	630	830	65-70	50/600	50-55	600	0,62	8,1	3,5	366	330	193	-
BL00630103002B0N0000	630	1030	65-70	50/600	50-55	600	0,75	9,7	4,1	443	399	233	300
BL00630123002B0N0000	630	1230	65-70	50/600	50-55	600	0,88	11,3	4,7	519	467	273	300
BL00630153002B0N0000	630	1530	65-70	50/600	50-55	600	1,08	13,6	5,7	637	574	335	600

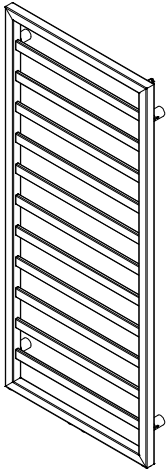


BILLO 530x1230 axonometric drawing

Horizontal profiles:



Vertical manifolds:



Finishing and warranty:

Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;

Mounting brackets:

brackets in the colour of the radiator are included

Valve:

order separately

Heater :

order separately

Working pressure:

10 barów

Maximum temperature:

120 °C

Connections:



- inner threads G 1/2
- air-vent plug G1/8 hidden behind

