



Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
R0008440524053030000	844	524	125-130	747	52-57	774	0,79	12,0	4,1	454	409	238	300
R0012940524053030000	1294	524	125-130	1198	52-57	1224	1,16	17,4	5,7	661	595	346	600
R0017440524053030000	1744	524	125-130	1648	52-57	1674	1,54	22,8	7,3	855	769	445	600

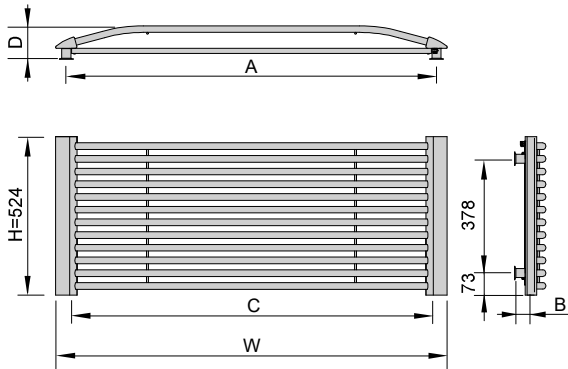

Horizontal tubes:		Vertical manifolds:	
Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;		
Mounting brackets:	brackets in the colour of the radiator are included		
Valve:	order separately		
Heater:	order separately		
Accessories:	order separately		
Working pressure:	4 bars		
Maximum temperature:	120 °C		
Connections:		<ul style="list-style-type: none"> - inner threads G 1/2 - air-vent plug G1/8 hidden behind 	

CAPRI C

Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing intervals [mm]	Connections distance from the wall [mm]	Brackets spacing intervals [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
C0007341744051030000	734	1744	125-130	50	52-57	588	2,17	32,6	10,4	1348	1212	703	-

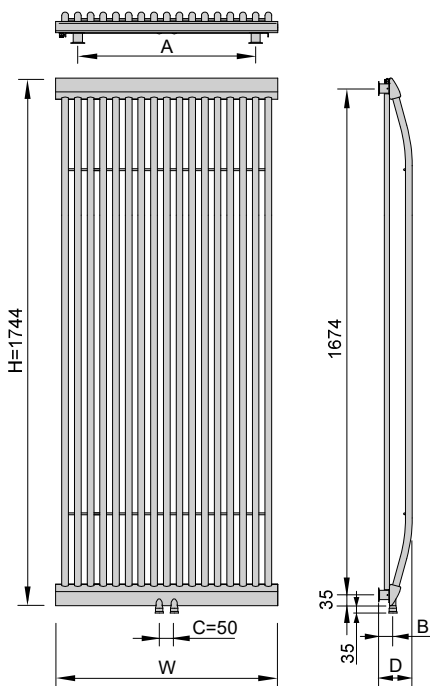

Vertical tubes:		Horizontal manifolds:	
Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;		
Mounting brackets:	brackets in the colour of the radiator are included		
Valve:	order separately		
Accessories:	set of hanging pegs HK – 4 pieces included		
Working pressure:	4 bars		
Maximal temperature:	120 °C		
Connections:		<ul style="list-style-type: none"> - inner threads G 1/2 - air-vent plug G1/8 hidden behind 	
Remarks:	water inlet on the left		