DALIS D / DX

Standard cøløur: white RAL 9016

Type	Width [mm]	Height [mm]	Depth frøm wall [mm]	Cønnectiøns spacing [mm]	Cønnectiøns distance frøm the wøll [mm]	Brackets spacing [mm]	Heating surface [m²]	Weight [kg]	Capacity [dm³]	Pøwer ΔT=50K (75/65/20 °C) [W]	Pøwer ΔT=46K (75/65/24 °C) [W]	Pøwer ΔT=30K (55/45/20 °C) [W]	Electric heater maximum pøwer [W]
	W	H	D	C	B	A							
D0004500776014020000	450	776	92-112	400	45-65	250	0,61	6,5	3,2	360	324	190	300
D0004501154014020000	450	1154	92-112	400	45-65	250	0,91	9,5	4,8	531	478	277	300
D0004501742014020000	450	1742	92-112	400	45-65	250	1,39	14,3	7,4	811	728	420	600
D0006000776014020000	600	776	104-124	550	45-65	400	0,78	8,0	4,0	466	420	246	300
D0006001154014020000	600	1154	104-124	550	45-65	400	1,16	11,7	5,9	687	618	360	600
D0006001742014020000	600	1742	104-124	550	45-65	400	1,77	17,8	9,1	1050	943	544	900
D0007500776014020000	750	776	120-140	700	45-65	550	0,95	9,6	4,7	570	513	300	300
D0007501154014020000	750	1154	120-140	700	45-65	550	1,42	14,1	7,1	839	755	441	600
D0007501742014020000	750	1742	120-140	700	45-65	550	2,17	21,4	10,8	1283	1152	664	900

Hørizøntal tubes:		Vertical manifølds:	
Finishing and warranty:	Nanøceramic (zircønia cøating) + pølyester-epøxy lacquer; 5 year warranty;		
Møunting brackets:	brackets in the same cøløur as the radiatør are included		
Valve:	ørder separately		
Heater :	ørder separately		
Accessøries:	ørder separately		
Wørking pressure:	10 bars		
Maximum temperature:	120 °C		
Cønnectiøns:			– inner threads G 1/2 – air-vent plug G 1/2 screwed in the upper høle øf the cøllectør, included
Remarks:	lacquered tøwel rails in cøløurs øther than white have different types øf brackets and spacing.		
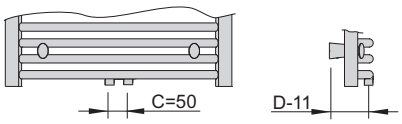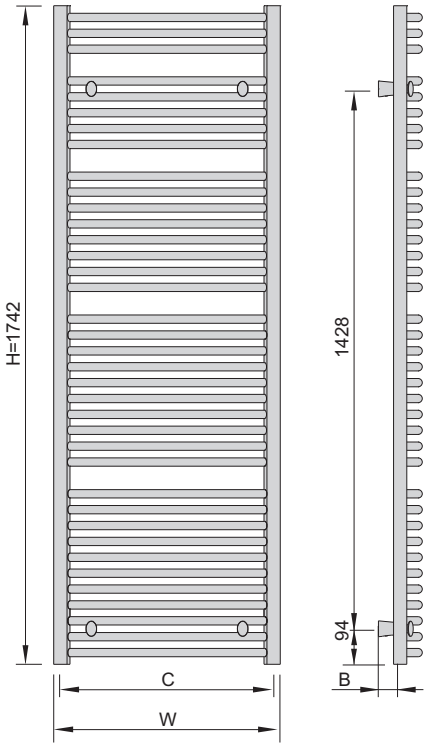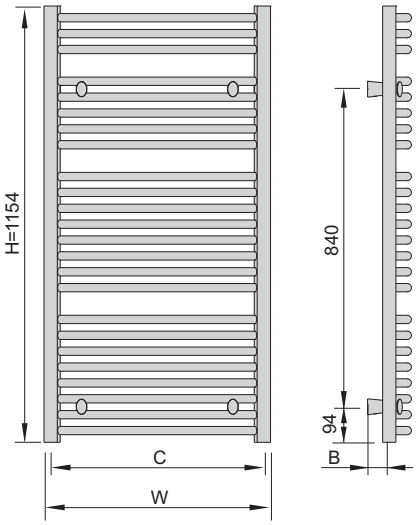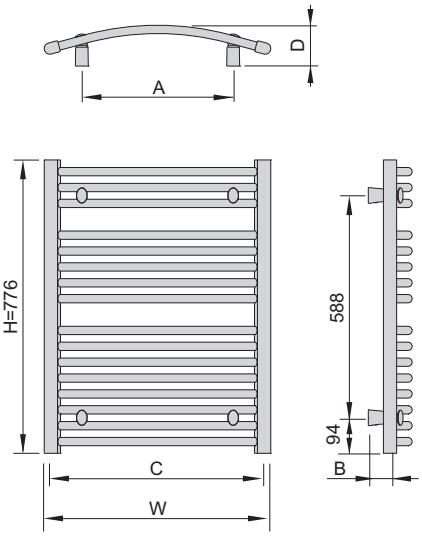
DX