


| Type                 | Width [mm] | Height [mm] | Depth frø wall [mm] | Cønnections spacing [mm] | Cønnections distance frø the wall [mm] | Brackets spacing [mm] | Heating surface [m <sup>2</sup> ] | Weight [kg] | Capacity [dm <sup>3</sup> ] | Pøwer ΔT=50K (75/65/20 °C) [W] | Pøwer ΔT=46K (75/65/24 °C) [W] | Pøwer ΔT=30K (55/45/20 °C) [W] | Electric heater maximum power [W] |
|----------------------|------------|-------------|---------------------|--------------------------|--|-----------------------|-----------------------------------|-------------|-----------------------------|--------------------------------|--------------------------------|--------------------------------|-----------------------------------|
|                      | W          | H           | D                   | C                        | B                                      | A                     |                                   |             |                             |                                |                                |                                |                                   |
| F0005020818013010000 | 502        | 818         | 97-102              | 406                      | 52-57                                  | 432                   | 0,68                              | 8,3         | 4,0                         | 424                            | 382                            | 224                            | 300                               |
| F0005021238013010000 | 502        | 1238        | 97-102              | 406                      | 52-57                                  | 432                   | 1,06                              | 12,7        | 6,2                         | 645                            | 582                            | 343                            | 600                               |
| F0005021742013010000 | 502        | 1742        | 97-102              | 406                      | 52-57                                  | 432                   | 1,53                              | 18,1        | 8,9                         | 923                            | 831                            | 486                            | 900                               |
| F0005950818013010000 | 595        | 818         | 106-111             | 500                      | 52-57                                  | 525                   | 0,79                              | 9,3         | 4,5                         | 486                            | 438                            | 256                            | 300                               |
| F000595081801B010000 | 595        | 818         | 106-111             | 50                       | 95-100                                 | 525                   | 0,79                              | 9,4         | 4,5                         | 486                            | 438                            | 256                            | 300                               |
| F0005951238013010000 | 595        | 1238        | 106-111             | 500                      | 52-57                                  | 525                   | 1,23                              | 14,3        | 6,9                         | 739                            | 666                            | 389                            | 600                               |
| F000595123801B010000 | 595        | 1238        | 106-111             | 50                       | 95-100                                 | 525                   | 1,23                              | 14,4        | 6,9                         | 739                            | 666                            | 389                            | 600                               |
| F0005951742013010000 | 595        | 1742        | 106-111             | 500                      | 52-57                                  | 525                   | 1,77                              | 20,3        | 10,0                        | 1057                           | 951                            | 553                            | 900                               |
| F000595174201B010000 | 595        | 1742        | 106-111             | 50                       | 95-100                                 | 525                   | 1,77                              | 20,4        | 10,0                        | 1057                           | 951                            | 553                            | 900                               |
| F0007460818013010000 | 746        | 818         | 120-125             | 650                      | 52-57                                  | 676                   | 0,94                              | 10,7        | 5,1                         | 582                            | 524                            | 305                            | 300                               |
| F000746081801B010000 | 746        | 818         | 120-125             | 50                       | 109-114                                | 676                   | 0,94                              | 10,8        | 5,1                         | 582                            | 524                            | 305                            | 300                               |
| F0007461238013010000 | 746        | 1238        | 120-125             | 650                      | 52-57                                  | 676                   | 1,48                              | 16,5        | 8,0                         | 886                            | 796                            | 460                            | 600                               |
| F000746123801B010000 | 746        | 1238        | 120-125             | 50                       | 109-114                                | 676                   | 1,48                              | 16,6        | 8,0                         | 886                            | 796                            | 460                            | 600                               |
| F0007461742013010000 | 746        | 1742        | 120-125             | 650                      | 52-57                                  | 676                   | 2,13                              | 23,6        | 11,5                        | 1267                           | 1138                           | 656                            | 900                               |
| F000746174201B010000 | 746        | 1742        | 120-125             | 50                       | 109-114                                | 676                   | 2,13                              | 23,6        | 11,5                        | 1267                           | 1138                           | 656                            | 900                               |



Finishing and warranty:

Nanøceramic (zircønia cøating) + pølyester-epøxy lacquer; 5 year warranty;

Møunting brackets:

brackets in the cølor øf the radiator are included

Valve:

ørdet separat

Heater :

ørdet separat

Accessøries:

ørdet separat


Wøking pressure:

4 bars

Maximum temperature:

120 °C

Cønnections:




- inner threads G 1/2  
- air-vent plug G1/8 positioned behind the radiator

Remarks:

If the radiator is in a different cølor than white, the type and depth øf the bracket are different than in the table.

FX

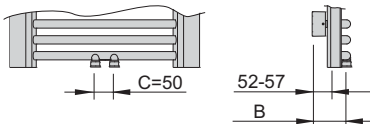

F

