

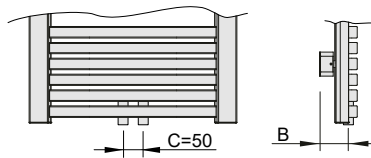


Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
LK004500817014010000	450	817	86-91	374	51-56	385	0,6	8,7	2,8	328	297	178	300
LK00450081701C010000	450	817	86-91	50	86-91	385	0,6	8,7	2,8	328	297	178	300
LK004501237014010000	450	1237	86-91	374	51-56	385	1,0	13,1	4,2	499	451	270	300
LK00450123701C010000	450	1237	86-91	50	86-91	385	1,0	13,1	4,2	499	451	270	300
LK004501741014010000	450	1741	86-91	374	51-56	385	1,4	18,5	6,0	710	642	384	600
LK00450174101C010000	450	1741	86-91	50	86-91	385	1,4	18,5	6,0	710	642	384	600
LK005500817014010000	550	817	94-99	474	51-56	485	0,7	10,0	3,1	387	350	210	300
LK00550081701C010000	550	817	94-99	50	94-99	485	0,7	10,0	3,1	387	350	210	300
LK005501237014010000	550	1237	94-99	474	51-56	485	1,1	15,1	4,7	589	533	319	300
LK00550123701C010000	550	1237	94-99	50	94-99	485	1,1	15,1	4,7	589	533	319	300
LK005501741014010000	550	1741	94-99	474	51-56	485	1,6	21,4	6,6	839	759	454	600
LK00550174101C010000	550	1741	94-99	50	94-99	485	1,6	21,4	6,6	839	759	454	600
LK006500817014010000	650	817	102-107	574	51-56	585	0,9	11,4	3,4	446	404	242	300
LK00650081701C010000	650	817	102-107	50	108-113	585	0,9	11,4	3,4	446	404	242	300
LK006501237014010000	650	1237	102-107	574	51-56	585	1,3	17,2	5,1	679	614	368	600
LK00650123701C010000	650	1237	102-107	50	108-113	585	1,3	17,2	5,1	679	614	368	600
LK006501741014010000	650	1741	102-107	574	51-56	585	1,9	24,3	7,3	968	875	523	900
LK00650174101C010000	650	1741	102-107	50	108-113	585	1,9	24,3	7,3	968	875	523	900


LKX

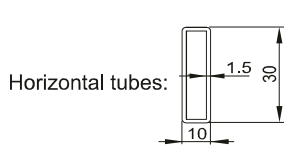


LK

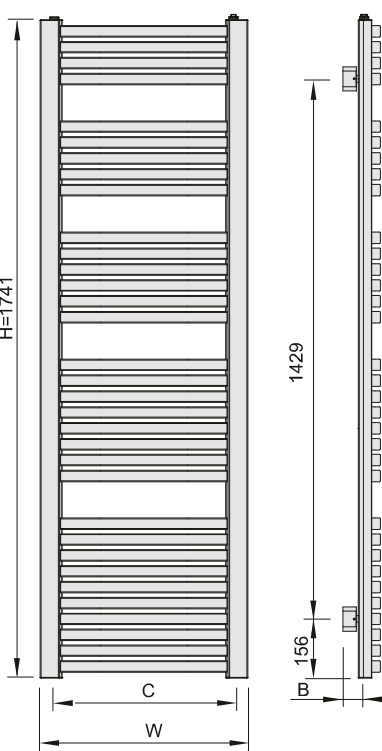

Horizontal tubes:

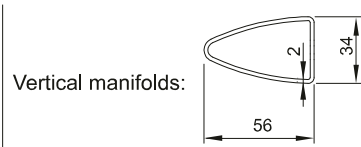

Vertical manifolds:

Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	brackets in the colour of the radiator are included
Valve:	order separately
Heater :	order separately
Accessories:	order separately
Working pressure:	8 bars
Maximum temperature:	120 °C
Connections:	 <ul style="list-style-type: none"> - inner threads G 1/2 - air-vent plug G 1/2, screwed in the upper hole of the collector is included
Remarks:	valid for LKX radiator: water inlet on the left side

