



Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power $\Delta T=50K$ (75/65/20 °C) [W]	Power $\Delta T=46K$ (75/65/24 °C) [W]	Power $\Delta T=30K$ (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
MD00600061514L071000	600	615	90	50	55	400	0,98	14,1	6,5	379	342	200	-
MD00600047114L071000	600	471	90	50	55	400	0,77	11,7	5,4	297	268	157	-
MD01000061514L071000	1000	615	90	50	55	800	1,58	21,5	10,2	631	569	334	-
MD01000047114L071000	1000	471	90	50	55	800	1,24	17,5	8,3	496	447	262	-
MD01400061514L071000	1400	615	90	50	55	1200	2,18	28,8	13,8	883	796	467	-
MD01400047114L071000	1400	471	90	50	55	1200	1,70	23,3	11,2	694	625	367	-
MD01800061514L071000	1800	615	90	50	55	1600	2,77	36,2	17,4	1136	1024	601	-
MD01800047114L071000	1800	471	90	50	55	1600	2,16	29,1	14,1	892	804	471	-
MD02200061514L071000	2200	615	90	50	55	2000	3,37	43,5	21,1	1388	1251	734	-
MD02200047114L071000	2200	471	90	50	55	2000	2,62	35,0	17,0	1091	983	576	-

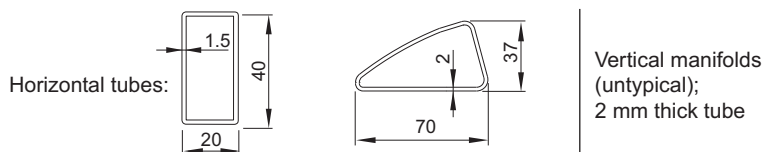

Finishing and warranty:	Cataphoresis + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	Galvanized snap fastener mounting brackets are included
Valve:	order separately
Heater:	-
Working pressure:	4 bars
Maximum temperature:	120 °C
Connections:	 inner threads G 1/2 air-vent plug G1/8 hidden behind
Remarks:	<ul style="list-style-type: none"> <li>- Location of connections and the feed pipe: on the left side of the radiator</li> <li>- Connections to the right side available upon request (in this case the feed pipe is on the right side, whereas the return pipe is on the left)</li> </ul>

