


Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
MG00340160014N071000	340	1600	88	50	53	1504	1,60	19,0	13,2	720	645	369	600
MG00340180014N071000	340	1800	88	50	53	1704	1,80	21,2	14,9	806	722	413	600
MG00340200014N071000	340	2000	88	50	53	1904	2,00	23,4	16,5	892	800	457	600



Finishing and warranty:	Cataphoresis + polyester-epoxy lacquer; 5 year warranty;	
Mounting brackets:	set for assembly on the wall; steel box brackets – the same colour as the radiator	
Valve:	order separately	
Heater:	-	
Working pressure:	6 bars	
Maximum temperature:	120 °C	
Connections:		inner threads G 1/2 included and air-vent plug G 1/2 screwed in the upper hole of the collector,
Accessories:	order separately	

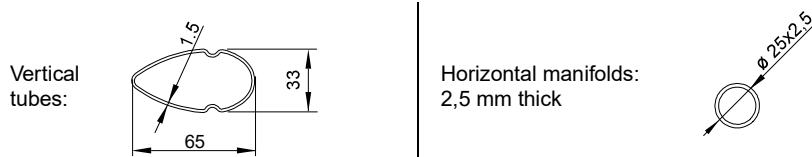