





Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
PT005080650014020000	508	650	78-98	458	63-83	350	0,52	5,5	2,7	300	271	159	-
PT005080818014020000	508	818	78-98	458	63-83	350	0,65	6,8	3,4	375	338	197	300
PT005080986014020000	508	986	78-98	458	63-83	350	0,77	8,1	4,1	450	405	235	300
PT005081154014020000	508	1154	78-98	458	63-83	350	0,90	9,4	4,8	526	473	273	300
PT005081490014020000	508	1490	78-98	458	63-83	350	1,16	12,0	6,2	676	608	353	600

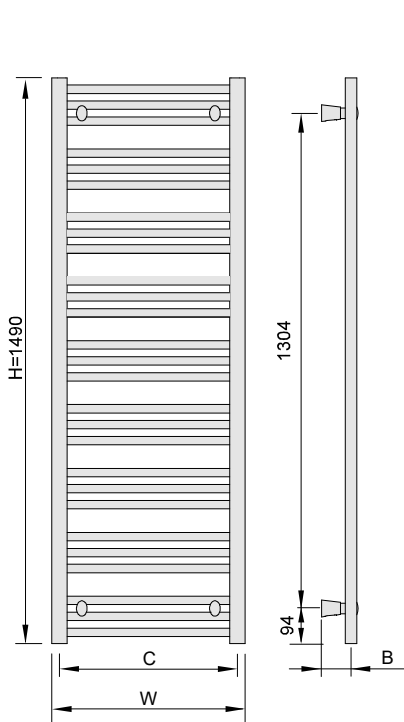

Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	brackets in the same colour as the radiator are included
Valve:	to place a separate order
Heater :	to place a separate order
Accessories:	to place a separate order
Working pressure:	10 bars
Maximal temperature:	120°C
Connections:	 <ul style="list-style-type: none"> - inner threads G 1/2 - air-vent plug G 1/2, screwed in the upper hole of the collector is included
Remarks:	lacquered towel rails in colours other than white have different types of brackets and spacing.

