




Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
P0003400776014020000	340	776	78-98	290	63-83	200	0,48	5,3	2,7	279	252	148	-
P000340077601C020000	340	776	78-98	50	63-83	200	0,48	5,3	2,7	279	252	148	-
P0003401154014020000	340	1154	78-98	290	63-83	200	0,71	7,7	4,0	410	369	213	300
P000340115401C020000	340	1154	78-98	50	63-83	200	0,71	7,7	4,0	410	369	213	300
P0004580776014020000	458	776	78-98	408	63-83	300	0,61	6,5	3,2	359	323	189	300
P000458077601C020000	458	776	78-98	50	63-83	300	0,61	6,5	3,2	359	323	189	300
P0004581154014020000	458	1154	78-98	408	63-83	300	0,91	9,5	4,8	527	474	274	300
P000458115401C020000	458	1154	78-98	50	63-83	300	0,91	9,5	4,8	527	474	274	300
P0004581742014020000	458	1742	78-98	408	63-83	300	1,39	14,3	7,4	828	745	434	600
P000458174201C020000	458	1742	78-98	50	63-83	300	1,39	14,3	7,4	828	745	434	600
P0006080776014020000	608	776	78-98	558	63-83	450	0,78	8,0	4,0	456	410	239	300
P000608077601C020000	608	776	78-98	50	63-83	450	0,78	8,0	4,0	456	410	239	300
P0006081154014020000	608	1154	78-98	558	63-83	450	1,16	11,7	5,9	669	601	346	600
P00060811541C020000	608	1154	78-98	50	63-83	450	1,16	11,7	5,9	669	601	346	600
P0006081742014020000	608	1742	78-98	558	63-83	450	1,77	17,8	9,1	1051	945	548	900
P000608174201C020000	608	1742	78-98	50	63-83	450	1,77	17,8	9,1	1051	945	548	900
P0007640776014020000	764	776	78-98	558	63-83	600	0,95	9,6	4,7	552	496	287	300
P000764077601C020000	764	776	78-98	50	63-83	600	0,95	9,6	4,7	552	496	287	300
P0007641154014020000	764	1154	78-98	558	63-83	600	1,42	14,1	7,1	811	728	418	600
P000764011541C020000	764	1154	78-98	50	63-83	600	1,42	14,1	7,1	811	728	418	600
P0007641742014020000	764	1742	78-98	558	63-83	600	2,17	21,4	10,8	1274	1144	660	900
P000764174201C020000	764	1742	78-98	50	63-83	600	2,17	21,4	10,8	1274	1144	660	900

PSD  
the possibility of assembling to the wall as a partition.



Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	brackets in the colour of the radiator are included
Valve:	order separately
Heater :	order separately
Accessories:	order separately
Working pressure:	4 bars
Maximum temperature:	120 °C
Connections:	<ul style="list-style-type: none"> <li>- inner threads G 1/2</li> <li>- air-vent plug G1/8 hidden behind</li> </ul>
Remarks:	lacquered towel rails in colours other than white have different types of brackets and spacing.

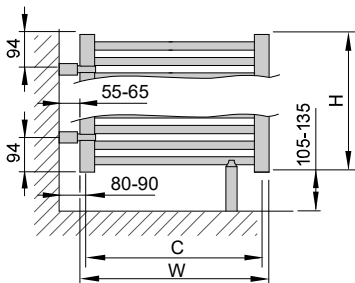