

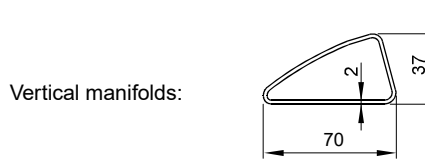


Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
Q0005950812023030000	595	812	101-106	500	52-57	525	0,75	10,2	3,5	392	354	210	300
Q000595081202G030000	595	812	101-106	50	78-83	525	0,75	10,3	3,5	392	354	210	300
Q0005951097023030000	595	1097	101-106	500	52-57	525	1,08	14,4	4,9	553	498	293	300
Q000595109702G030000	595	1097	101-106	50	78-83	525	1,08	14,5	4,9	553	498	293	300
Q0005951667023030000	595	1667	101-106	500	52-57	525	1,70	22,2	7,7	849	765	448	600
Q000595166702G030000	595	1667	101-106	50	78-83	525	1,70	22,3	7,7	849	765	448	600



Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;		
Mounting brackets:	brackets in the colour of the radiator are included		
Valve:	order separately		
Heater :	order separately		
Working pressure:	4 bars		
Maximum temperature:	120 °C		
Connections:	<div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 0 auto; display: flex; align-items: center; justify-content: center;">Q</div> <p>1l 1g</p> </div> <div style="text-align: center;"> <div style="border: 1px solid black; width: 20px; height: 20px; margin: 0 auto; display: flex; align-items: center; justify-content: center;">QX</div> <p>1l 1g MM</p> </div> </div>	– inner threads G 1/2 – air-vent plug G1/8 hidden behind	
Accessories:	order separately		
Remarks:	Water inlet on the left side		

QX

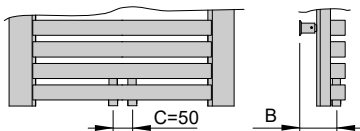

Q

