



Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
STP0376180014P081000	376	1800	123	50	108	1690	3,44	48,3	20,5	1358	1200	638	900
STP0376200014P081000	376	2000	123	50	108	1890	3,81	52,5	22,5	1505	1330	707	900
STP0472180014P081000	472	1800	123	50	108	1690	4,32	58,8	25,2	1706	1508	801	900
STP0472200014P081000	472	2000	123	50	108	1890	4,78	64,1	27,8	1890	1671	887	900
STP0568180014P081000	568	1800	123	50	108	1690	5,20	69,1	30,0	2054	1816	964	900
STP0568200014P081000	568	2000	123	50	108	1890	5,76	75,5	33,0	2274	2010	1068	900

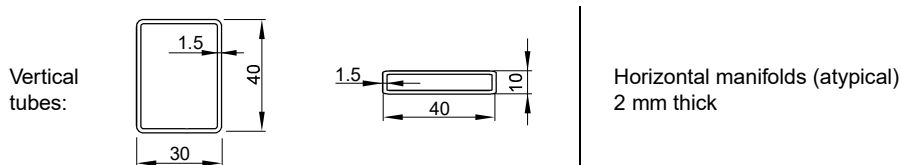

Finishing and warranty:	Cataphoresis + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	set for assembly on the wall; steel box brackets – the same colour as the radiator
Valve:	order separately
Heater:	order separately
Working pressure:	8 bars
Maximum temperature:	120 °C
Connections:	 inner threads G 1/2 air-vent plug G 1/2 screwed in the upper hole of the collector, included
Accessories:	order separately

