

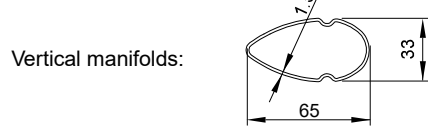


Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	Electric heater maximum power [W]
	W	H	D	C	B	A							
TG00606081802B030000	606	818	66-71	50	52-57	520	0,77	8,7	4,3	419	379	226	300
TG00606123802B030000	606	1238	66-71	50	52-57	520	1,20	13,2	6,8	656	592	353	600
TG00606174202B030000	606	1742	66-71	50	52-57	520	1,73	18,7	9,7	943	851	504	900



Finishing and warranty:	Nanoceramic (zirconia coating) + polyester-epoxy lacquer; 5 year warranty;
Mounting brackets:	brackets in the same colour as the radiator are included
Valve:	order separately
Heater :	order separately
Accessories:	order separately
Working pressure:	6 bars
Maximum temperature:	120 °C
Connections:	 <ul style="list-style-type: none"> - inner threads G 1/2 - air-vent plug G1/8 hidden behind the radiator

