



Kod produktu	Szerokość [mm]	Wysokość [mm]	Głębokość [mm]	Rozstaw przyłączy [mm]	Odległość przyłączy od ściany [mm]	Rozstaw uchwytów [mm]	Powierzchnia grzewcza [m <sup>2</sup> ]	Masa [kg]	Pojemność [dm <sup>3</sup> ]	Moc dla ΔT=50K (75/65/20 °C) [W]	Moc dla ΔT=46K (75/65/24 °C) [W]	Moc dla ΔT=30K (55/45/20 °C) [W]	Maksymalna moc grzałki elektrycznej [W]
	W	H	D	C	B	A							
F0005950818233020000	595	818	106-126	500	52-72	400	0,79	9,4	4,5	271	244	143	-
F0005951238233020000	595	1238	106-126	500	52-72	400	1,23	14,4	6,9	410	369	216	300
F0005951742233020000	595	1742	106-126	500	52-72	400	1,77	20,4	10,0	632	569	331	600

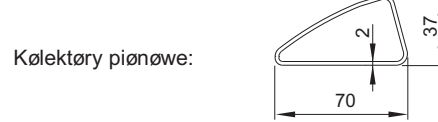

Wykończenie i gwarancja:	Chrom galwaniczny; gwarancja 5 lat
Uchwyty montażowe:	Komplet do montażu ściennego; uchwyty w kolektorze grzejnika
Zawór:	Dł odrębnego zamówienia
Grzałka:	Dł odrębnego zamówienia
Aksesoria:	Dł odrębnego zamówienia
Ciśnienie robocze:	4 bary
Temperatura maksymalna:	120 °C

Przyłącza:		Gwinty wewn. G1/2 Odpowietrznik G1/8 ukryty z tyłu
------------	------------------------------------------------------------------------------------	-------------------------------------------------------

