


Type	Width [mm]	Height [mm]	Depth from wall [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m ²]	Weight [kg]	Capacity [dm ³]	Power ΔT=50K (75/65/20 °C) [W]	Power ΔT=46K (75/65/24 °C) [W]	Power ΔT=30K (55/45/20 °C) [W]	LED light maximum power [W]
	W	H	D	C	B	A							
RMB05950944...	595	944	92-97	50	72-77	525	1,00	25,0	5,3	470	423	245	17
RMB05951448...	595	1448	92-97	50	72-77	525	1,47	38,0	7,5	693	623	362	27



RADIATOR	Finishing and warranty:	Cataphoresis+epoxy-polyester coating; 10 year warranty	
	Mounting brackets:	Wall mounting set; brackets in the color of the radiator	
	Valve:	Ordered separately	
	Heating element:	-	
	Max. operating pressure:	4 bar	
	Max. temperature:	75 °C	
Connection type:		Internal thread G1/2 Purge valve G1/8 hidden in the back	
Accessories:	Ordered separately		
Comments:	Water inlet on the left		
LIGHT	Power supply:	12V DC	
	Light source:	Non-replaceable LEDs, 4500K, 20000h	
	Electric connector:	Female connector Φ5,5/2,5;	
	Light control switch:	Built-in touch switch with dimmer	
Comments:	Power adapter ordered separately		
PAINTING	Painting:	Painted by hand using the BATIK technique, vacuum laminated between Optiwhite™ glass panes	
	Comments:	Painting motif selection in acc. with ENIX catalogue	

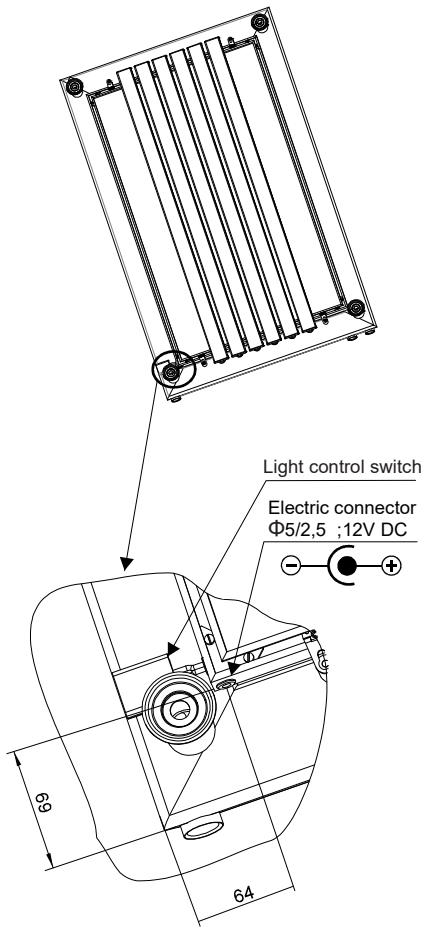